

## AXOR ShowerSolutions

### Basic set for thermostatic module 360/120 for concealed installation

Surfaces: **n.a.**      Article Number: **10750180**



### Description


## product features

- 3 outlets can be used simultaneously
- flow rate at free through-flow: 59 l/min
- spindle valves
- connection from left or right
- horizontal or vertical installation
- sound-decoupled installation
- in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- connection dimension: DN20
- SVGW 1108-5907
- ETA VA1.43/20399
- ACS 19 ACC LY 041, valide jusqu'au 07.11.2023
- WRAS 1806015
- WRAS 1806015
- JWWA E-565
- SINTEF 3095
- REG 4 170412
- STA 1401

### Product image



## Scale drawing

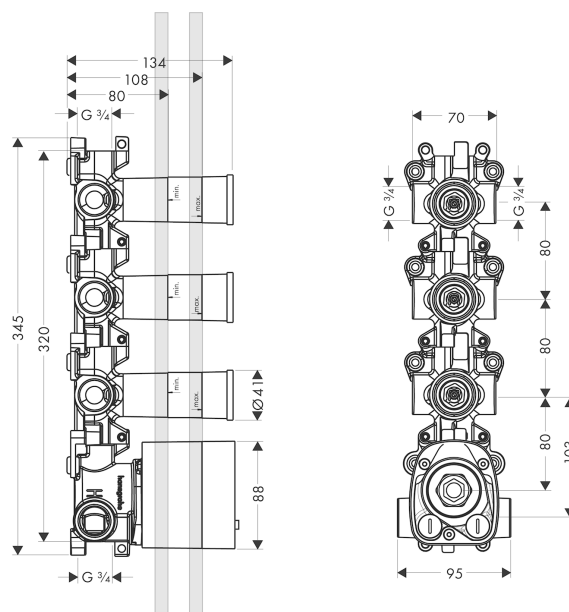




## AXOR ShowerSolutions

Basic set for thermostatic module 360/120 for concealed installation

Surfaces: n.a. Article Number: 10750180



### Installation examples

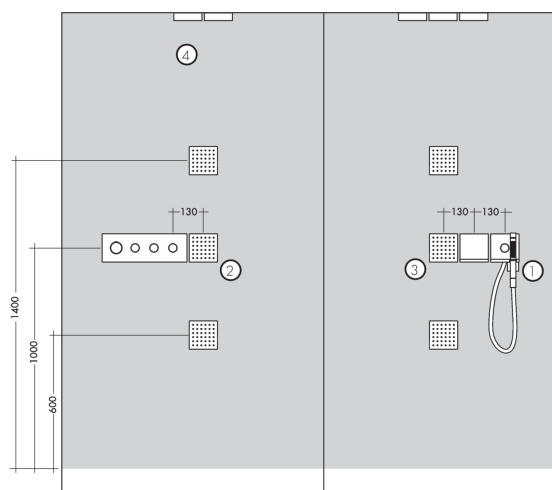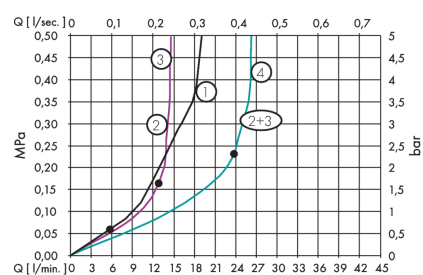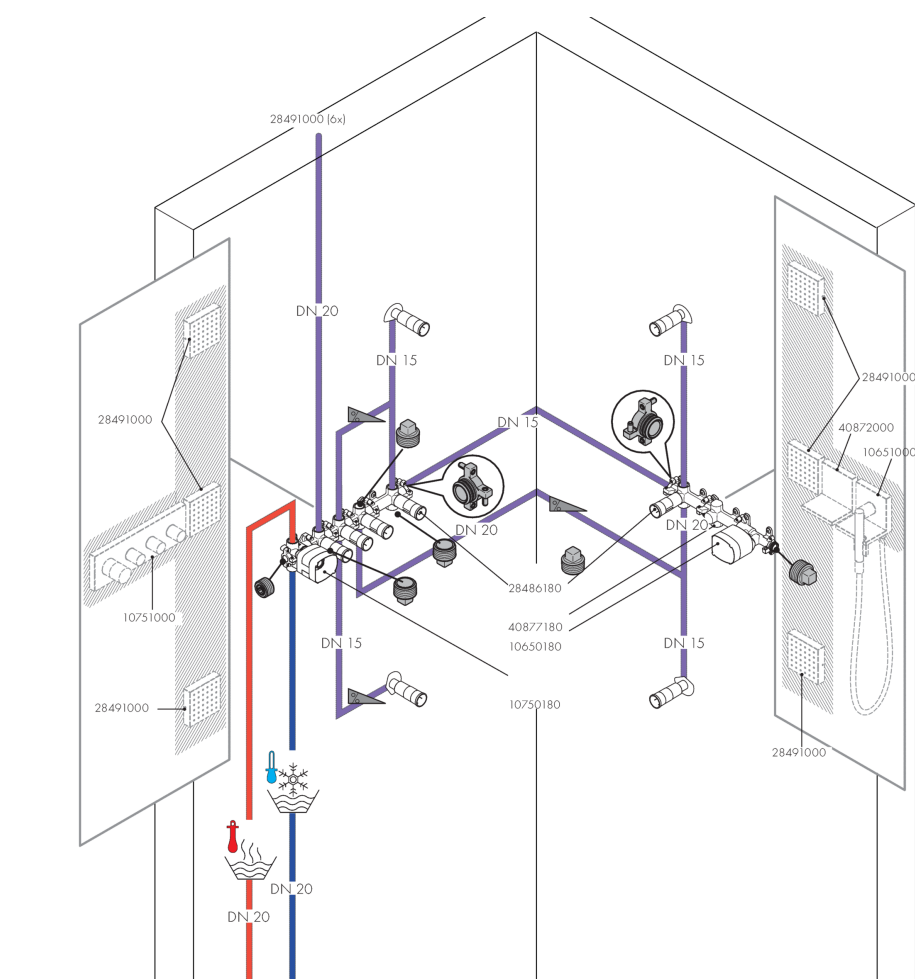

## AXOR ShowerSolutions


Basic set for thermostatic module 360/120 for concealed installation

Surfaces: n.a. Article Number: 10750180



### Exploded Drawing

Year of production: >03/15

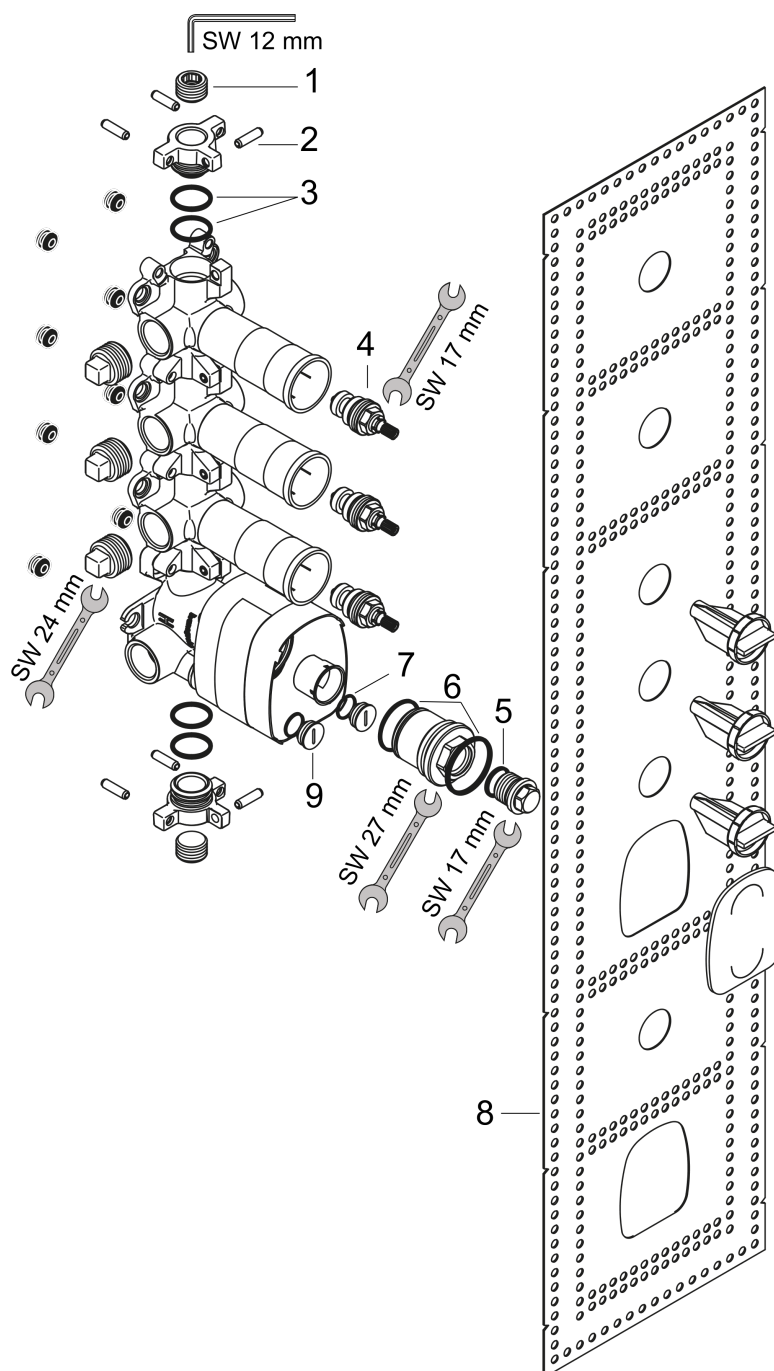

## AXOR ShowerSolutions

**Basic set for thermostatic module 360/120 for concealed installation**

Surfaces: n.a. Article Number: **10750180**



### Spare part list

Year of production: >03/15

Pos.	Description	Article Number	PC	PU
1	plug	97998000	0	1
2	pin	95334000	0	1
3	O-Ring 23x2,5	98183000	0	1
4	shut off unit with spindle 1/2"	94142000	0	1
5	O-ring 18x2	98181000	0	1
6	O-ring 38x2,5	98198000	0	1
7	O-ring 15x1,5	92118000	0	1
8	sealing foil	95336000	0	1
9	plug	92859000	0	1