

AXOR ShowerSolutions

Basic set for thermostatic module 120/120 for concealed installation

Surfaces: n.a. Article Number: **10754180**



Description


product features

- flow rate at free through-flow: 59 l/min
- horizontal or vertical installation
- sound-decoupled installation
- in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- connection dimension: DN20
- SVGW 1108-5907
- ACS 16 ACC LY 346, valide jusqu'au 06.01.2021
- WRAS 1806015
- WRAS 1806015
- JWWA E-417
- REG 4 170412
- STA 1401

Product image



Scale drawing

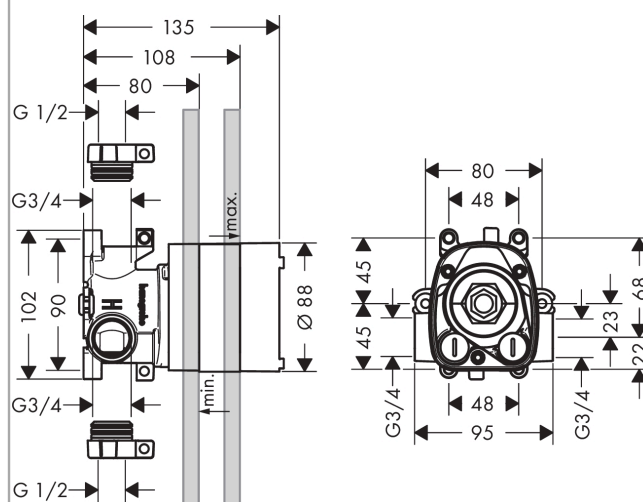

AXOR ShowerSolutions


Basic set for thermostatic module 120/120 for concealed installation

Surfaces: n.a. Article Number: 10754180



Exploded Drawing

Year of production: >04/15

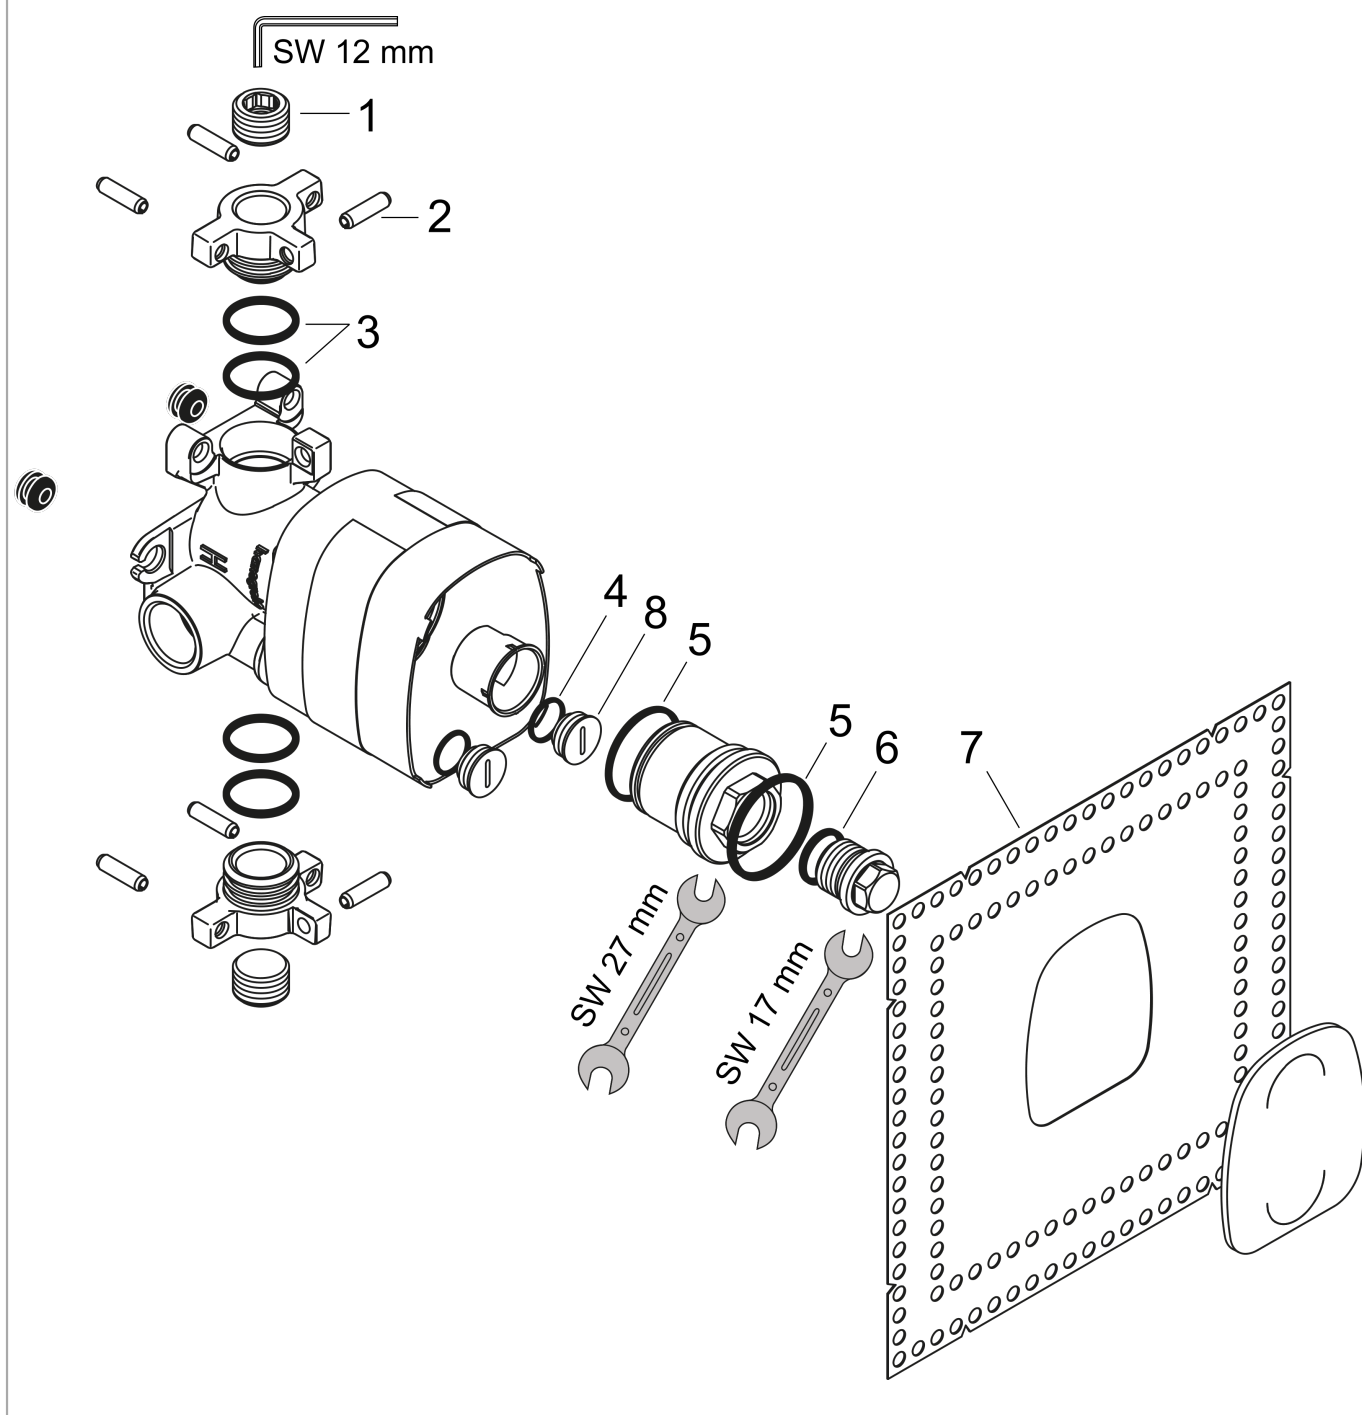

AXOR ShowerSolutions

Basic set for thermostatic module 120/120 for concealed installation

Surfaces: n.a. Article Number: **10754180**



Spare part list

Year of production: >04/15

Pos.	Description	Article Number	PC	PU
1	plug	97998000	0	1
2	plug	95335000	0	1
3	O-Ring 23x2,5	98183000	0	1
4	O-ring 15x1,5	92118000	0	1
5	O-ring 38x2,5	98198000	0	1
6	O-ring 18x2	98181000	0	1
7	sealing foil	95389000	0	1
8	plug	92859000	0	1
a	Grease	90920000	0	1