

AXOR Uno

Electronic basin mixer with temperature pre-adjustment with mains connection 230 V

Surfaces: **Chrome** Article Number: **38010000**



Description

product features

- ComfortZone 100
- projection 148 mm
- normal spray
- flow rate at 3 bar: 3.5 l/min
- theft-proof aerator
- temperature adjustable via iBox
- suitable for continuous flow water heaters
- infrared sensor technology
- automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared sensor (2 settings)
- 230 V / 50 Hz mains connection
- hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation)
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- manual water stop for washbasin cleaning
- performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- functional restriction due to too large distance
- connection dimension: DN15
- dirt filters in the connection hoses
- WELS 0153-19-0025
- PA-IX 7341/IO
- ACS 17 ACC NY 156, valide jusqu'au 27.04.2022
- STA 1428
- Agréé Belgaqua

Technology



AXOR Uno

Electronic basin mixer with temperature pre-adjustment with mains connection 230 V


Surfaces: **Chrome** Article Number: **38010000**




Product image



Scale drawing

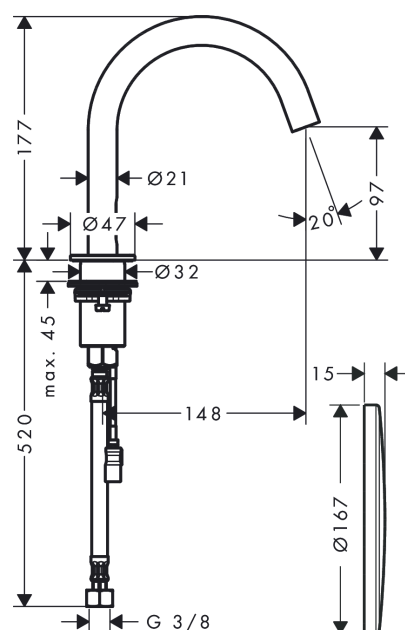

Flowchart

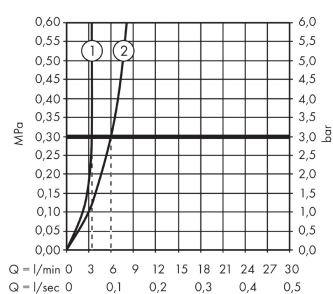

AXOR Uno


Electronic basin mixer with temperature pre-adjustment with mains connection 230 V

Surfaces: **Chrome** Article Number: **38010000**



Exploded Drawing

Year of production: >07/17

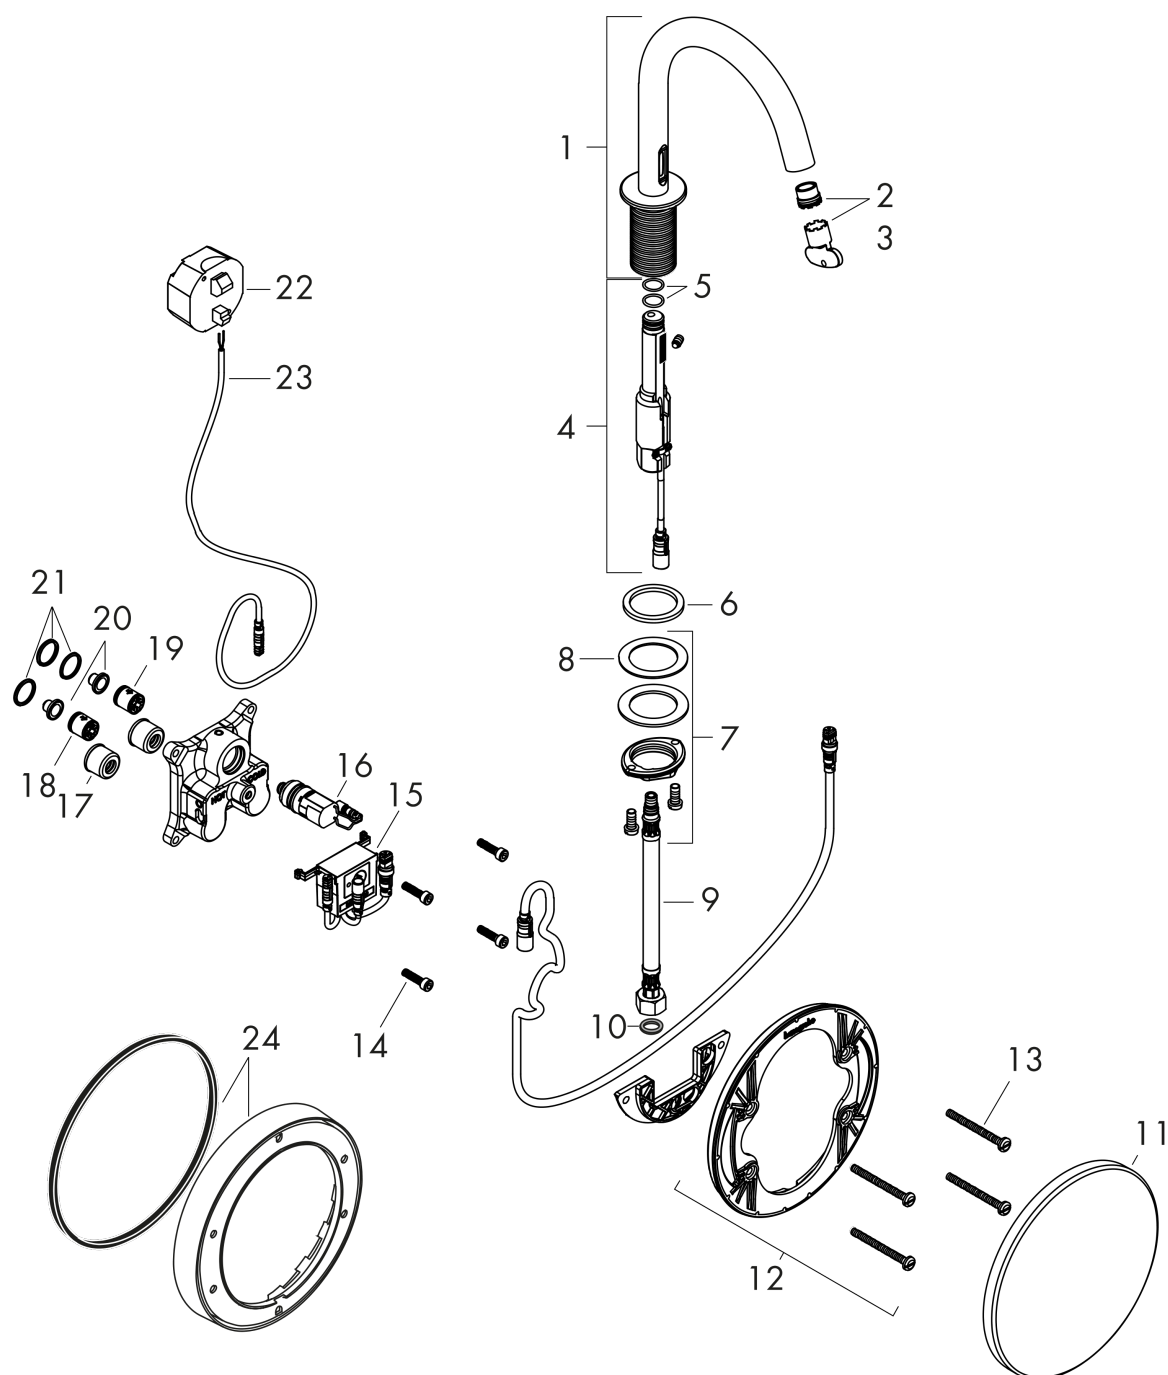

AXOR Uno

Electronic basin mixer with temperature pre-adjustment with mains connection 230 V

Surfaces: **Chrome** Article Number: **38010000**



Spare part list

Year of production: >07/17

Pos.	Description	Article Number	PC	PU
1	spout cpl.	92997000	0	1
2	aerator M16,5x1 (3,8 l/min)	92920000	0	1
3	special tool	98987000	0	1
4	electronics	92998000	0	1
5	O-ring 12x1,5	98430000	0	1
6	flat seal	98749000	0	1
7	fixing set (Ø 32)	13961000	0	1
8	lever collar	97548000	0	1
9	connection hose 450 mm M8x0,75 G3/8	97206000	0	1
10	O-ring 7x1,5	98422000	0	1
11	escutcheon Ø 170 mm	95946000	0	1
12	sub plate	96447000	0	1
13	set of fixing screws	96454000	0	1
14	set of screws	96525000	0	1
15	control system	93213000	0	1
16	solenoid valve 6 V	96904000	0	1
17	noise reduction	94073000	0	1
18	non return valve (pressure-resistant up to 2 MPa)	92594000	0	1
19	set of non return valves DW 15	94074000	0	1
20	filter packing	95291000	0	1
21	O-ring 16x2	98133000	0	1
22	transformer	95945000	0	1
23	cable for illumination (12 V)	95586000	0	1
24	extension 22 mm (Ø 170 mm)	13596000	0	1
a	-	16182180	0	1
b	fixation extension 35 mm	13898000	0	1