

AXOR ShowerSolutions

Thermostat 800 for exposed/ concealed installation

Surfaces: **Chrome** Article Number: **45440000**



Description

product features

- 2 outlets
- simultaneous use of several outlets
- Select push-button on/off control for 2 outlets
- flow rate hand shower connection at 0.3 MPa: 15 l/min
- flow rate upper outlet: 22 l/min
- Select valve, thermostat cartridge
- safety lock at 40° C
- temperature limitation adjustable
- non-return valve
- with silencer
- material handles: metal
- shelf made of safety glass
- shelf finish: mirror glass
- control of an external shower or bath tub filler via concealed connection G ½ possible
- connection type: basic set
- connection dimension: DN15
- dirt filter included
- ACS 17 ACC LY 462, valide jusqu'au 03.08.2022
- WRAS 1904069
- Reg 4 180032

Technology




AXOR ShowerSolutions
Thermostat 800 for exposed/ concealed installation
 Surfaces: **Chrome** Article Number: **45440000**




Product image



Scale drawing

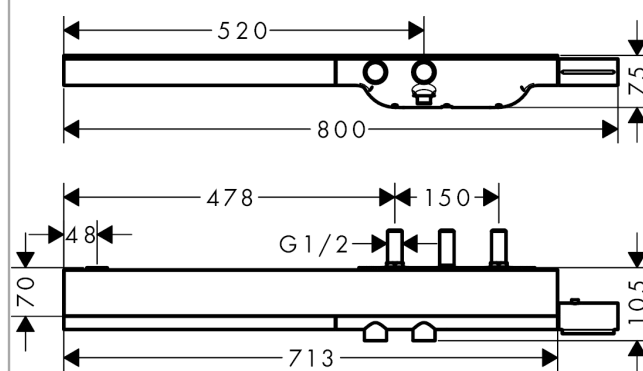

Flowchart

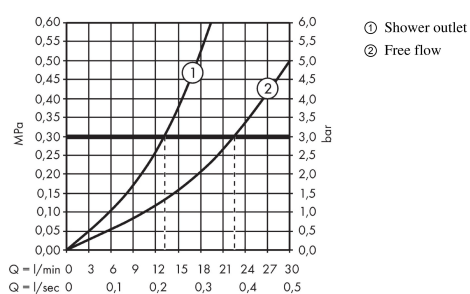


AXOR ShowerSolutions
Thermostat 800 for exposed/ concealed installation
 Surfaces: **Chrome** Article Number: **45440000**



Exploded Drawing

Year of production: >10/17

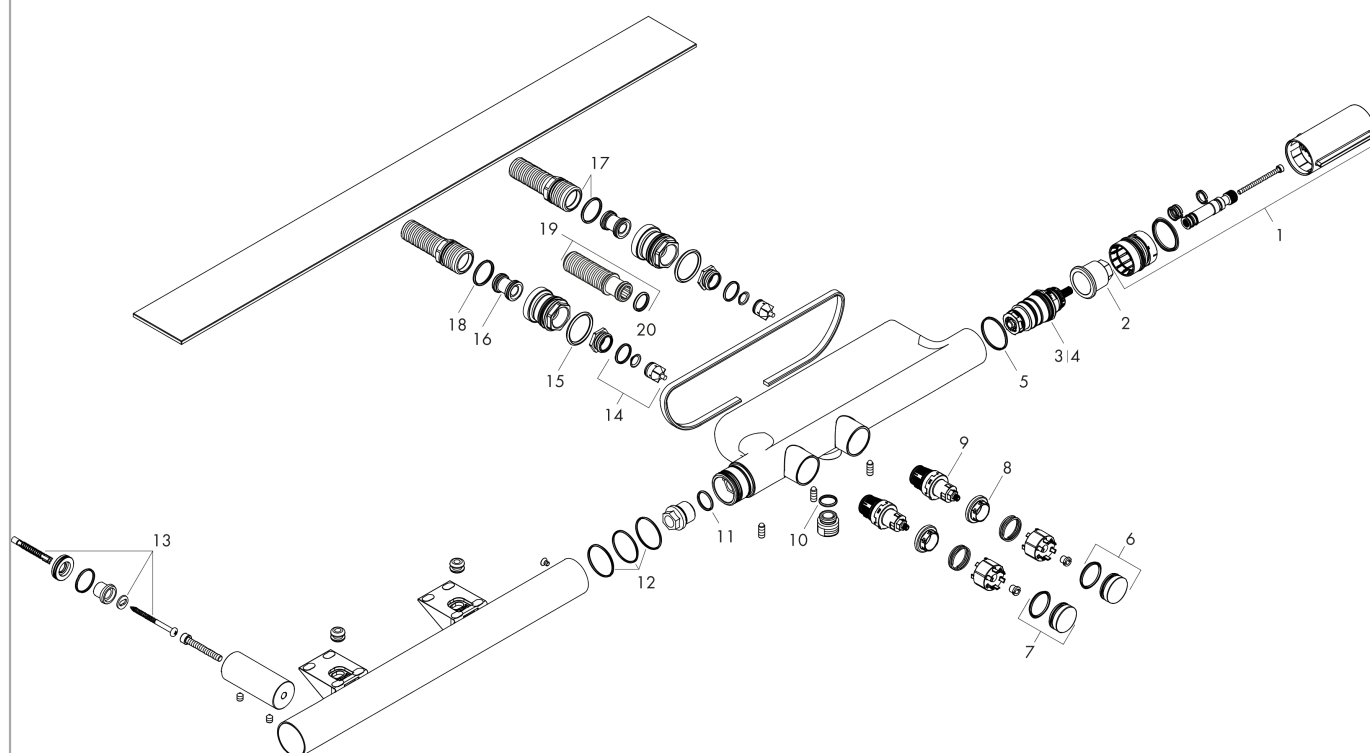

AXOR ShowerSolutions
Thermostat 800 for exposed/ concealed installation
 Surfaces: **Chrome** Article Number: **45440000**



Spare part list

Year of production: >10/17

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	93291000	0	1
2	nut	93294000	0	1
3	thermostat cartridge	98282000	0	1
4	cartridge for exchanged connections	92373000	0	1
5	O-ring 32x1,5	92936000	0	1
6	symbol handshower	93295000	0	1
7	symbol head shower Rain large	93302000	0	1
8	nut	98368000	0	1
9	shut off unit	95758000	0	1
10	O-ring 14x2	98129000	0	1
11	O-ring 18x2	98181000	0	1
12	O-ring 30x1,5	98433000	0	1
13	mounting set	96179000	0	1
14	non return valve (pressure-resistant up to 2 MPa)	95773000	0	1
15	O-ring 29x3	98371000	0	1
16	noise reduction	96429000	0	1
17	set of connecting threads	93231000	0	1
18	O-ring 23x2	98398000	0	1
19	connecting thread	93232000	0	1
20	O-ring 15x2,5	98131000	0	1
a	-	45442180	0	1